

Info letter about

Pretreatment of lignocellulose rich materials





Lignocellulose rich materials

Many agricultural by-products, such as straw and corn stover, are rich in cellulose, hemicellulose, and lignin. Cellulose, a key component of plant material, is tough and resistant to degradation. These cell walls need to be broken down to enable extraction of the desired substances. The toughness of these materials makes them difficult to digest for livestock, particularly monogastric animals (e.g., pigs and poultry) and, to a lesser extent, ruminants (e.g., cattle and sheep), however pretreatment softens the tough, fibrous structure of cellulose-rich feedstuffs, making them easier for animals to chew and digest. This improves the palatability of the feed, encouraging better intake by livestock.

Pretreatment helps break down these structures, making it easier for microorganisms to access and digest the material. Agricultural waste rich in cellulose, such as crop residues, is often abundant but underutilised. Pre-treating these materials enables more efficient recovery of energy and nutrients, turning waste into valuable inputs for processes like bioenergy production.



ADVANTAGES

Increased biogas yields

The technology has the potential to enhance biogas production and produce better bio-fertilizer. This is because pretreatment breaks down the cellulose and hemicellulose into simpler sugars, which microorganisms can ferment into biogas.

By improving the digestibility of the material, pretreatment increases the overall yield of biogas, making the process more efficient and cost-effective. Pre-treating cellulose-rich materials reduces the time needed for the material to break down in bioreactors or composting systems. This shorter retention time allows for faster turnover and greater processing capacity.

Enhanced nutrient availability

Pretreatment helps unlock the energy stored in the complex carbohydrates. Once broken down, these can provide a more accessible energy source for animals, leading to better growth rates and feed efficiency. Also, while cellulose itself does not contain protein, pretreatment often helps release bound nutrients, including proteins and amino acids from plant cell walls, making them more bioavailable.


The pretreatment process softens the tough, fibrous structure of cellulose-rich feedstuffs, making them easier for animals to chew and digest. This improves the palatability of the feed, encouraging better intake by livestock.

Thus, pretreatment allows low-cost, cellulose-rich agricultural by-products, which would otherwise be wasted, to be turned into valuable livestock feed. This provides farmers with an affordable and sustainable alternative to conventional feed sources.

Bio-fertilizer and soil nutrients

Pretreatment helps release nutrients like nitrogen, phosphorus, and potassium locked in plant cell walls, making them more readily available when used as fertilisers or soil conditioners after composting or digestion.

Pretreatment of lignocellulose rich materials can involve **mechanical or thermochemical separation** of the biomass using methods like steam explosion, crushing to extract different components like cellulose, hemicellulose, or lignin. These processes share the same goal, which is to **break down the biomass to enable processing and extraction** of components we need. These components can be used for various purposes. For example, from lignocellulose rich materials you can make biochar and vanilla flavor from wood, and plastic materials from plants

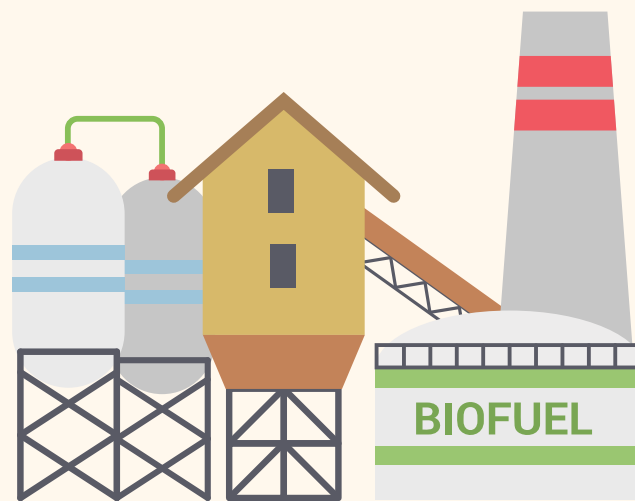

THERMAL PRETREATMENT METHODS

Thermal biomass pre-treatment is a process in which the long-chain structures of the lignocellulose are hydrolytically split by applying thermal energy and, if necessary, pressure, and subsequently made accessible for biological degradation.

There are three methods available.

1. Hydrothermal pre-treatment
2. Steam explosion
3. Thermal pressure hydrolysis

Through these processes, the utilisation of fibre-rich materials is enabled, increasing the range of raw materials applicable for biogas production. Also, this process reduces particle size and therefore increases the surface.

MECHANICAL PRETREATMENT METHODS

Mechanical pretreatment involves using physical processes to alter the structure of raw materials before they are used in biogas production or other processes. The goal is to make the material easier to break down by increasing its surface area or reducing its size. This is important because it helps microbes access more of the material during biodegradation, leading to faster and more efficient biogas production.

Common mechanical pretreatment methods include:

- Shredding: Cutting the material into smaller pieces.
- Grinding or Milling: Breaking down material into finer particles.
- Crushing: Applying pressure to crush the material into smaller parts.
- Cutting or Chopping: Using blades or other tools to cut the material into uniform pieces.

Choosing the right technology for pretreatment is important. Shredding equipment can be installed in various places, such as before the digester or inside the digester itself. Equipment types include chippers, mills, crushers, and screw conveyors with shredding units.



Interreg
Baltic Sea Region



Co-funded by
the European Union



CIRCULAR ECONOMY

BREC



BIOGASS
OSLOFJORD